

Preliminary

Helping Customers Innovate, Improve & Grow



Features

- 6-Pin SMD package
- Fast warm-up
- TCXO replacement for better short term stability
- Frequency Range, 10 MHz to 100 MHz
- Standard freq: 10, 12.8, 19.2, 20 MHz, AT- Cut
- Standard freq.: 10, 19.44, 20, 30.72, 38.88, 40 MHz SC-Cut

Applications

- Base stations
- Test equipment
- Femto base station
- Military communication equipment


Performance Specifications

Frequency Stabilities ¹ (AT-Cut Crystal-Standard - 10 to 20 MHz)						
Parameter	Min	Typical	Max	Units	Condition	Options ⁵
vs. operating temperature range (referenced to +25°C)	-100		+100	ppb	-20 to +70°C	
	-250		+250	ppb	-20 to +70°C	
	-250		+250	ppb	-40 to +85°C	
Initial tolerance	-0.5		+0.5	ppm	at time of shipment, nominal EFC V _s ±5% static Load ±5% static after 30 days of operation ≤ 60MHz; after 30 days of operation ≥ 60MHz; after 30 days of operation	
vs. supply voltage change	-20		+20	ppb		
vs. load change	-20		+20	ppb		
vs. aging / day	-10		+10	ppb		
vs. aging / year	-300		+300	ppb		
vs. aging / year	-500		+500	ppb		
Warm-up time			2	minutes	to ±200ppb of final frequency (1 hour reading) @ +25°C	
Frequency Stabilities ¹ (SC-Cut Crystal-Option 10 to 40 MHz)						
vs. operating temperature range (referenced to +25°C)	-30		+30	ppb	-20 to +70°C	
	-50		+50	ppb	-40 to +85°C	
Initial tolerance	-0.2		+0.2	ppm	at time of shipment, nominal EFC V _s ±5% static Load ±5% static after 30 days of operation ≤ 60 MHz; after 30 days of operation ≥ 60MHz; after 30 days of operation	
vs. supply voltage change	-10		+10	ppb		
vs. load change	-10		+10	ppb		
vs. aging / day	-5.0		+5.0	ppb		
vs. aging / year	-100		+100	ppb		
vs. aging / year	-500		+500	ppb		
Warm-up time			2	minutes	to ±100ppb of final frequency (1 hour reading) @ +25°C	

Performance Specifications

Supply Voltage (Vs)						
Parameter	Min	Typical	Max	Units	Condition	
Supply voltage (standard)	3.135	3.3	3.465	VDC		
Power consumption			2.2	Watts	during warm-up	
			0.7	Watts	steady state @ +25°C	
RF Output						
Signal [standard]	HCMOS					
Load		15		pF		
Signal Level (Vol)			0.4	VDC	with Vs=3.3V and 15pF Load	
Signal Level (Voh)	2.4			VDC	with Vs=3.3V and 15pF Load	
Duty Cycle	45		55	%	@ (Voh-Vol)/2	
Frequency Tuning (EFC)						
Tuning Range	Fixed OCXO; No adjust				Option ³	
Tuning Range	±5.0		±12	ppm		with AT cut crystal
	±1.0		±3	ppm		with SC cut crystal
Linearity	10%					
Tuning Slope	Positive					
Control Voltage Range	0.0	1.4	2.8	VDC	with Vs=3.3V	
Additional Parameters						
Phase Noise ³			-65	dBc/Hz	1 Hz	@ 10MHz
			-95	dBc/Hz	10 Hz	
			-120	dBc/Hz	100 Hz	
			-140	dBc/Hz	1 kHz	
			-145	dBc/Hz	10 kHz	
Weight			8.0	g		
Processing & Packing	Handling & Processing Note					
Absolute Maximum Ratings						
Supply voltage (Vs)			5.5	V	with Vs=5.0VDC	
Output Load			50	pF		
Operable Temperature Range	-55		+85	°C		
Storage Temperature Range	-55		+85	°C		



Outline Drawing / Enclosure



G 287
 H = 9.9 : G 287 A
 H = 5.9 : G 287 B
 H = 6.4 : G 287 C

Dimensions in mm


OX-500		
Height "H"	cover material	
9.9	plastic	SC- Cut Version
6.4	plastic	AT-Cut Version

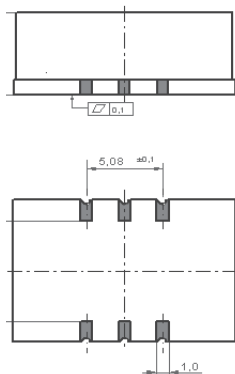

Padvorschlag
 land pattern
 recommendation

Pin Connections	
1	Electronic Frequency Control Input (EFC)
2	Enable
3	Ground (Case)
4	RF Output
5	Uref
6	Supply Voltage Input

Standard Shipping Method (OX-501)

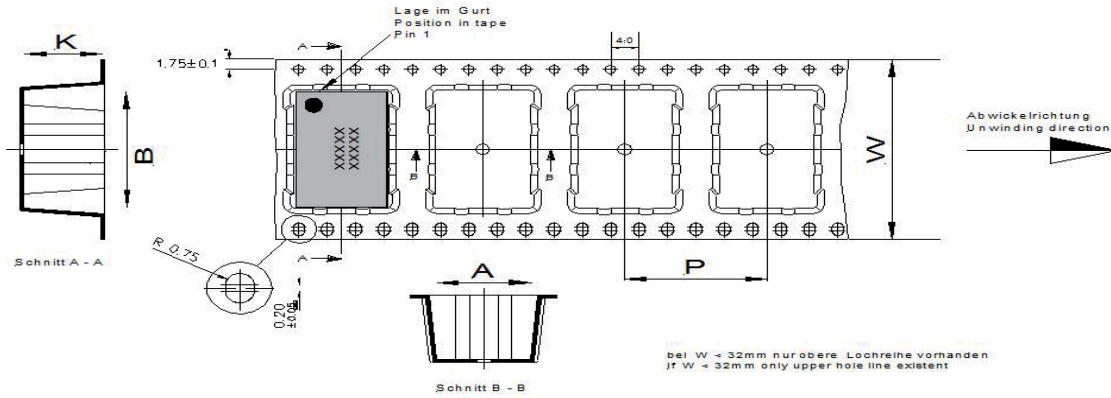

Maßangaben in mm :
A, B und K Maße vom Bauelement abhängig.
Fertigungstoleranzen entsprechen der DIN IEC 286-3


Dimension in mm :
A, B and K are dependent upon component dimensions,
production tolerance complying DIN IEC 286-3

All dimensions in millimetres unless otherwise stated.

Enclosure Type	Tape Width W (mm)	Quantity per meter	Quantity per reel	Dimension P
OX-5010 (9.9mm)	24	62.5	350	16
OX-5011 (6.4mm)	24	83.5	850	12

Recommended Reflow Profile


Solderprofile:

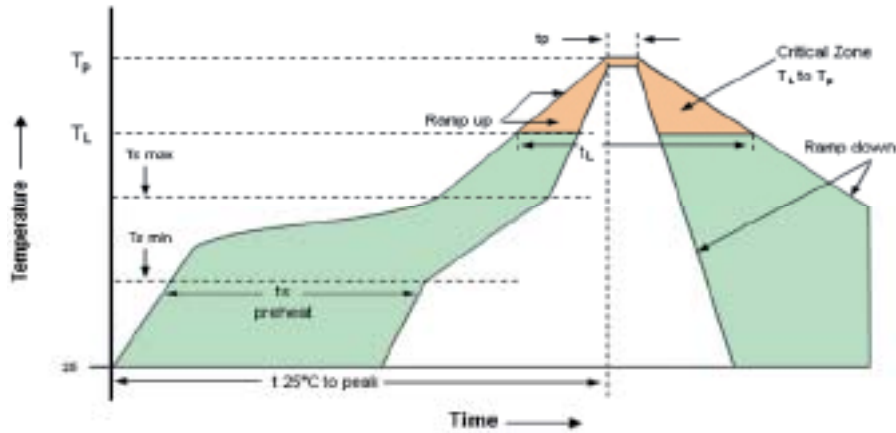

Profile Feature	Pb-Free Assembly/ Sn-Pb Assembly	Profile Feature	Pb-Free Assembly/ Sn-Pb Assembly
Average ramp-up rate (T_L to T_p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat -Temperature Min T_{Smin} -Temperature Min T_{Smax} -Time (min to max) t_s	150°C 200°C 60-180 seconds	Time maintained above -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
T_{Smax} to T_L -Ramp-up Rate	3°C/second max		
Time maintained above -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Peak Temperature (T_p)	max 260°C	Ramp-down Rate	6°C/ second max

Note: All temperatures refer to topside of the package, measured on the package body surface.

Ordering Information

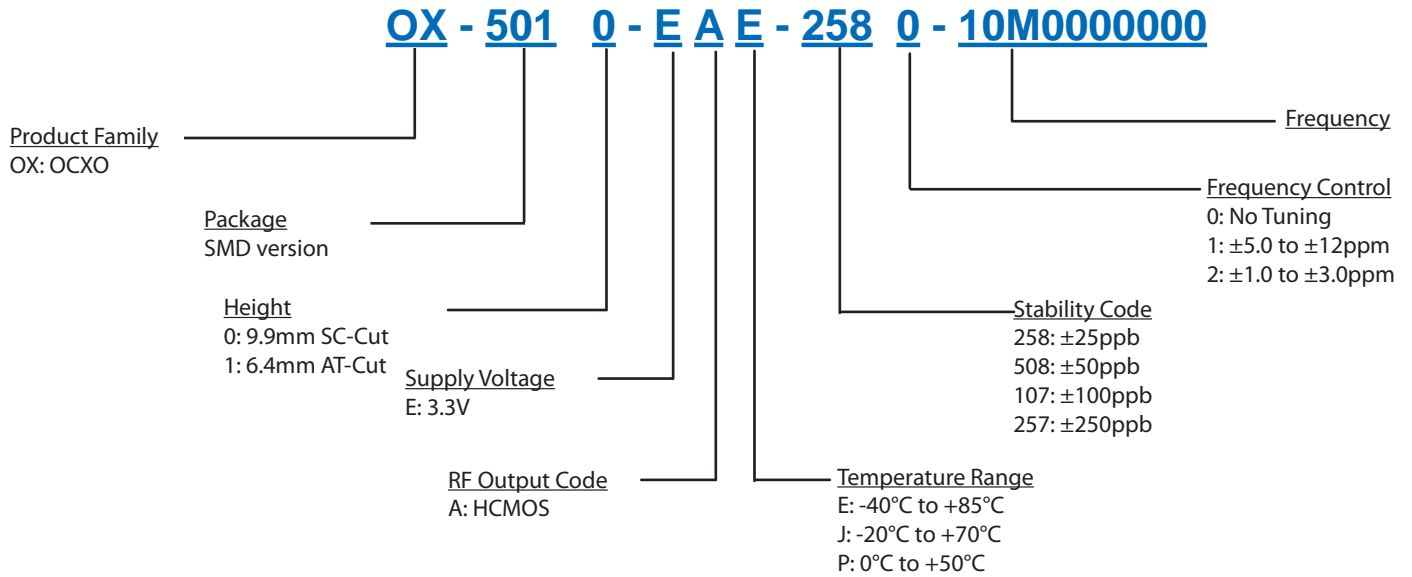

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 7268.801.100
Fax: +49 (0) 7268.801.282

Asia:

Vectron International
1589 Century Avenue, the 19th Floor
Chamtime International Financial Center
Shanghai, China
Tel: 86.21.6081.2888
Fax: 86.21.6163.3598

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 13 Aug 2011