

VI TELEFILTER**Filter Specification****TFS 70 AP****1/5****Measurement condition**

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedance: *
 Input: 142 Ω || -56 pF
 Output: 105 Ω || -64 pF

Characteristics**Remark:**

The nominal frequency f_N is fixed at 70,00 MHz. The insertion loss a_e is defined as loss value determined at f_N . Reference level for the relative attenuation a_{rel} of the TFS 70AP is the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 1,5 dB filter attenuation level relative to the insertion loss a_e . All specified data are met within the operating temperature range.

Data		typ. value		tolerance/limit	
Insertion loss	a_e	19,5	dB	max. 22	dB
Nominal frequency	f_N	-		70,00	MHz
Pass band	PB	-		$f_N \pm 0,61$	MHz
Amplitude ripple	PB	0,5	dB	max. 0,7	dB
Deviation from linear phase		1	deg	max. 5	deg
Triple transit suppression		50	dB	min. 30	dB
Relative attenuation	a_{rel}				
	$f_N \pm 0,630$ MHz	0,7	dB	max. 1,5	dB
	$f_N \pm 0,750$ MHz	40	dB	min. 35	dB
	$f_N \pm 0,900$ MHz	60	dB	min. 50	dB
Operating temperature range		-		- 5 °C ... + 65 °C	
Storage temperature range		-		- 40 °C ... + 85 °C	
Temperature coefficient of frequency (**)	TCf	-0,04	ppm/K ²	-	

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f_c(\text{Hz}) = TC_f (\text{ppm/K}^2) \times (T - T_A)^2 \times f_{cat}(\text{MHz})$



generated: _____

checked / approved: _____

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com


VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

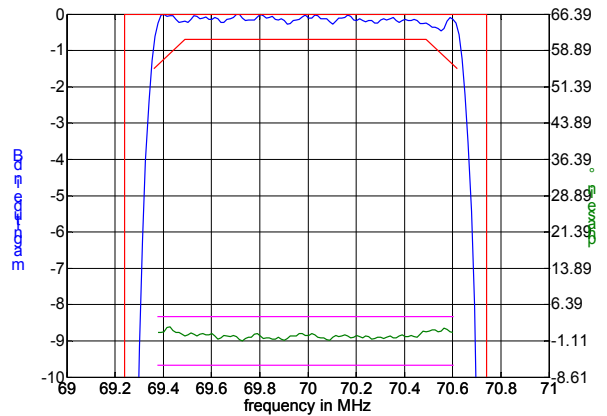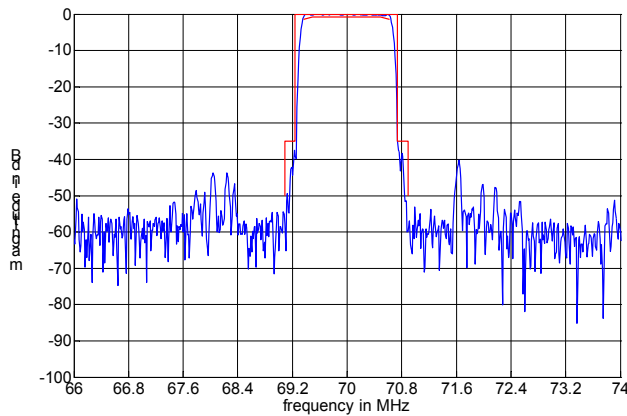

Construction and pin connection

(All dimensions in mm)

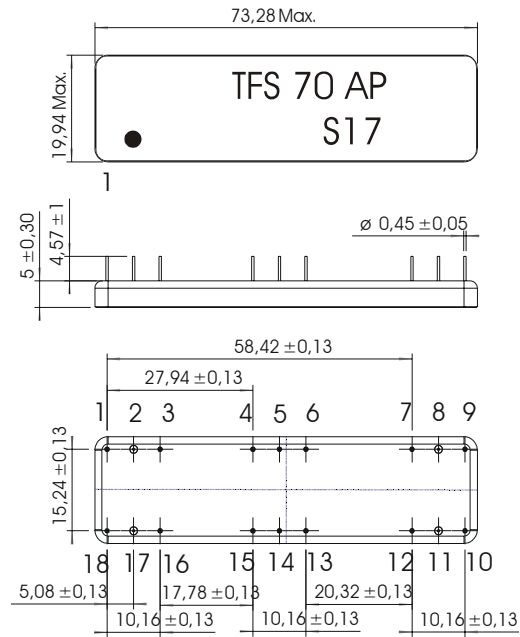


Date code: Year+week

S	2004
T	2005
U	2006
...	

Pin 1	Ground
Pin 2	Input
Pin 3	Ground
Pin 4	Ground
Pin 5	Ground
Pin 6	Ground
Pin 7	Ground
Pin 8	Ground
Pin 9	Ground
Pin 10	Ground
Pin 11	Output
Pin 12	Ground
Pin 13	Ground
Pin 14	Ground
Pin 15	Ground
Pin 16	Ground
Pin 17	Ground
Pin 18	Ground

50 Ohm Test circuit

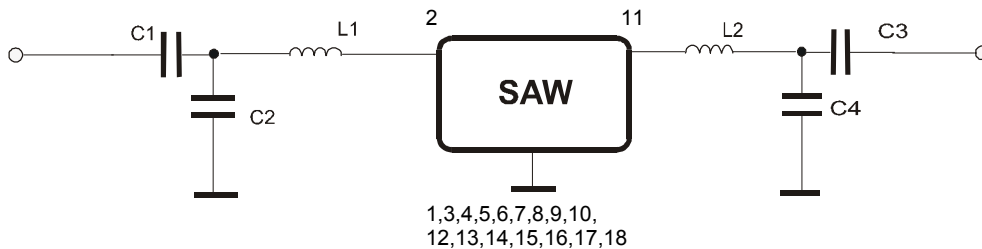

Tele Filter GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Chip-mount air reflow profile

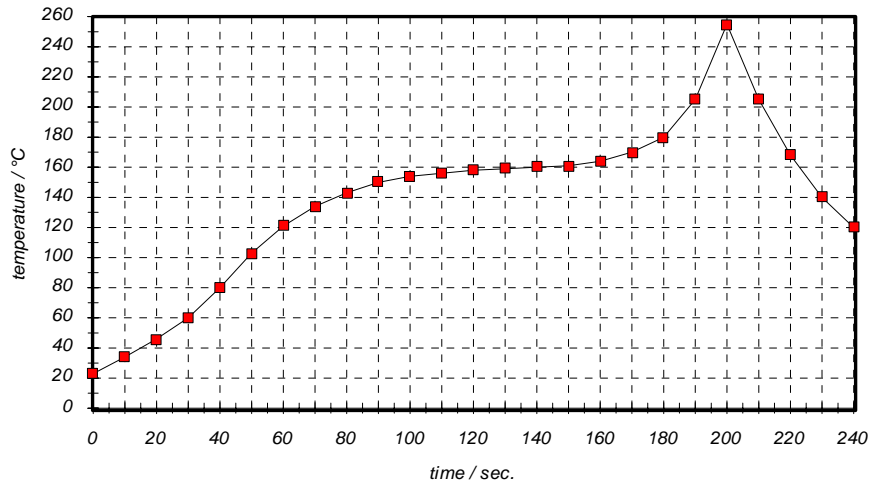


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter Specification****TFS 70 AP****5/5**

History

Version	Reason of Changes	Name	Date
1.0	Generation of specification	Steiner	23.04.2004

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.