

Features

- Ultra High Stability MCXO
- Low Power Consumption
- Up to 105°C in preparation
- Meets Stratum 3 acc. GR-1244
- ROHS 6 Compliant
- Frequency Range¹: 8 - 50 MHz
- Standard Frequencies : 10, 12.8, 16.384, 19.2, 20, 22.1184, 24.576, 25, 38.4, 40 MHz
- Uses Vectron's Ultra Smooth Compensation (USC) Algorithm
- Excellent Phase Noise and Allan Deviation

Applications

- 1588 Application
- Test Equipment
- Femto Base Station
- Communication Equipment


Performance Specifications

Frequency Stabilities ^{1,3} (Standard - 8 to 26 MHz)						
Parameter	Min	Typical	Max	Units	Condition ²	Options ³
vs. operating temperature range referenced to (dFmax+dFmin)/2	-20		+20	ppb	-20 to +70°C	
	-30		+30	ppb	-40 to +85°C	
	-100		+100	ppb	-40 to +105°C	
In a 24h period at constant temperature	-5		+5	ppb	after 7 days of continuous operation	
Frequency vs. temperature slope		±1.0		ppb/°C	-30 to +80°C, 10 & 20MHz	
		±1.5		ppb/°C	-40 to +85°C, 10 & 20MHz	
Initial tolerance	-0.5		+0.5	ppm	V _s ±5% static Load ±10% static after 30 days of operation after 30 days of operation	
vs. supply voltage change	-10		+10	ppb		
vs. load change	-10		+10	ppb		
vs. aging / 1. year	-0.8		+0.8	ppm		
vs. aging / 10 years	-2.5		+2.5	ppm		

Performance Specifications

Supply Voltage (V _s)					
Parameter	Min	Typical	Max	Units	Condition ²
Supply Voltage (standard)	3.135	3.3	3.465	V	8 - 50MHz
Current Consumption			12	mA	
Supply Voltage (Option)	4.75	5	5.25	V	
Current Consumption			8	mA	
RF Output					
Signal [standard]	HCMOS				
Load		15		pF	
Signal Level (Vol)			0.3	V	V _s = 3.3V
Signal Level (Voh)	3			V	V _s = 3.3V
Duty Cycle	45		55	%	@ V _s /2
Rise and Fall time			5	ns	10 to 90 %
Frequency Tuning (EFC) 8 to 26 MHz					
Tuning Range	Fixed frequency; No adjust				Option ³
Tuning Range	±3.5		+10	ppm	
Linearity			2	%	10 & 20MHz
Tuning Slope	Positive				
Control Input Impedance	20			kOhm	
Control Voltage (V _c) Range	0.0	1.65	3.3	V	@ 3.3V
	0.5	2.5	4.5	V	@ 5V
Additional Parameters					
Phase Noise ⁴		-65 -93 -118 -140 -154 -156		dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	1 Hz 10 Hz 100 Hz 1 kHz 10 kHz 100 kHz @ 20MHz
Jitter		140		fs RMS	@ 12 kHz to 20 MHz
ADEV			80	E-12	@ 1sec.
			80	E-12	@10sec
Weight			2.0	g	
Processing & Packing	Handling & Processing Note				
Reflow Profile	IPC / JEDEC J-STD-020 (latest version)				
Absolute Maximum Ratings					
Supply Voltage (V _s)	-0.6		6.0	V	
Output Load			50	pF	
Operable Temperature Range	-40		+85	°C	
Storage Temperature Range	-40		+90	°C	
Environmental Conditions					
Rapid Temperature Changes	MIL-883-1010 Cond B 500 cycles -55/125C				
Vibration	MIL-STD-883 Meth 2007 Cond A 20G 20-2000Hz 4x in each 3axis 4 min				
Shock	MIL-STD-202 Meth 213B Cond. F; 1500g 0,5ms 6 shocks in each direction				
Solderability	J_STD_002C Cond A, Through hole device/ Cond. B, SMD 255C (diving time 50,5sec.) Dip+Look with 8h damp pre-treatment: solder wetting >95%				
Solvent Resistance	MIL-STD-883 Meth 2015 Solv. 1,3,4				
ESD	JESD22-A114F Class 1B; 10* 2000V				
Moisture Sensitivity	Level 1 JESD22-A113-B				
RoHS Compliance	100% ROHS 6 Compliant				




Outline Drawing / Enclosure

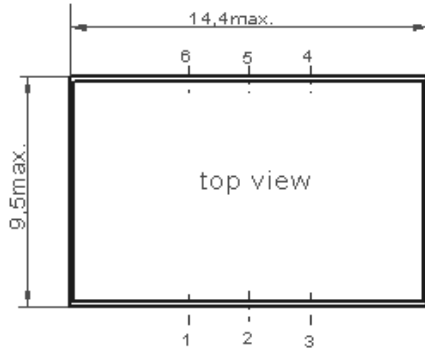

G 287

MX-503	
Height "H"	Pin Length "L"
3.8	NA

Pin Connections	
1	Control Voltage Input (Vc) / N.C.
2	Enable / N.C.
3	Ground (Case)
4	RF-Output
5	N.C.
6	Supply Voltage Input (Vs)

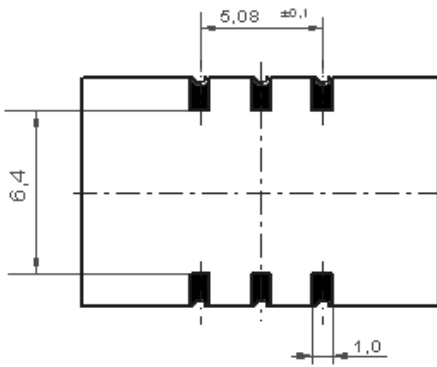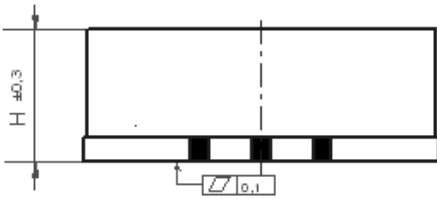


Dimensions in mm

Padvorschlag
land pattern
recommendation


Enable true table (optional): MX-503	
Pin 2	Pin 4
High	Data
Open	Data
Low	High Tristate

Performance Data


TDEV-without filter

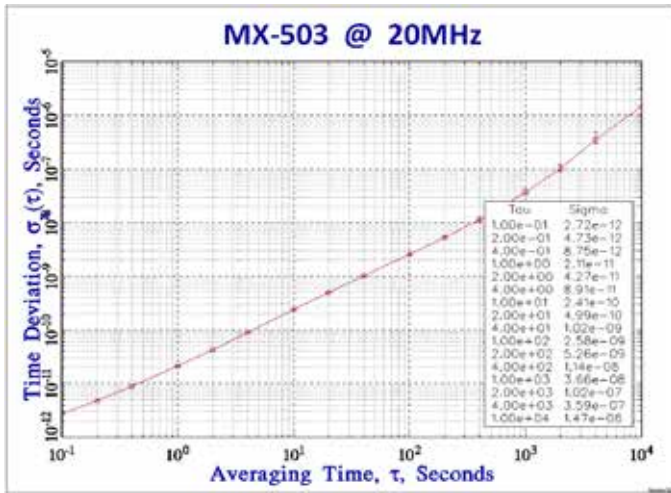


ADEV

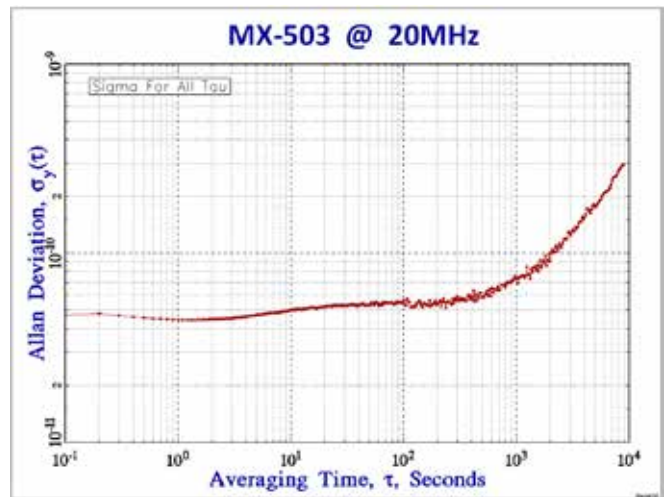

Temperature Stability

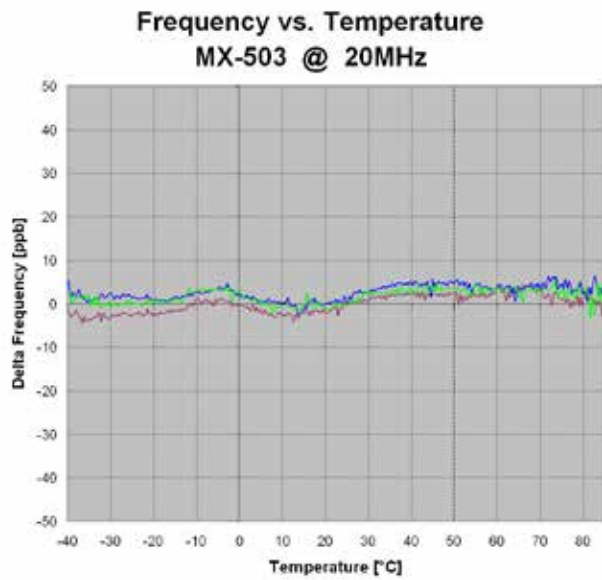



Phase Noise⁴

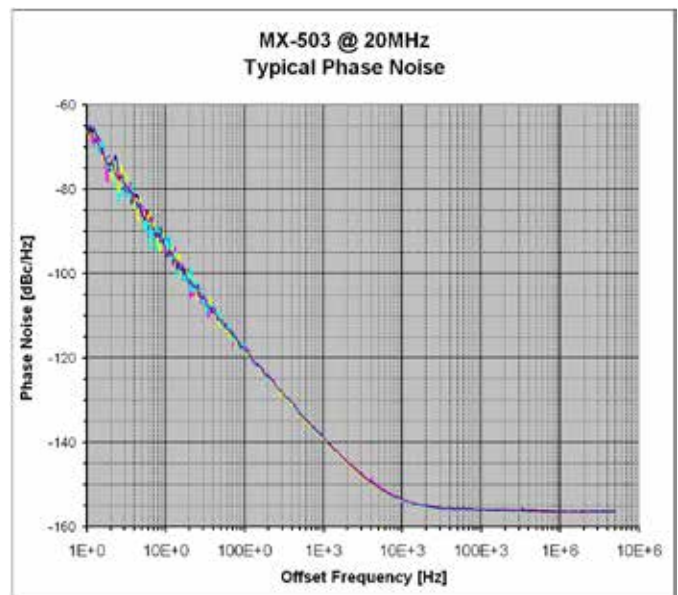

Performance Data


Frequency vs. Load

Frequency vs. Supply Voltage

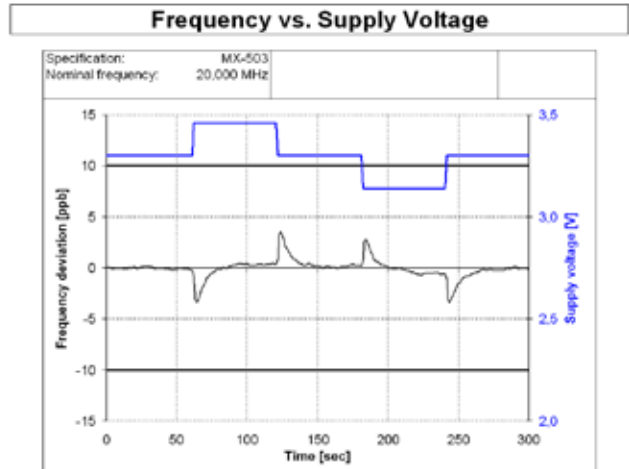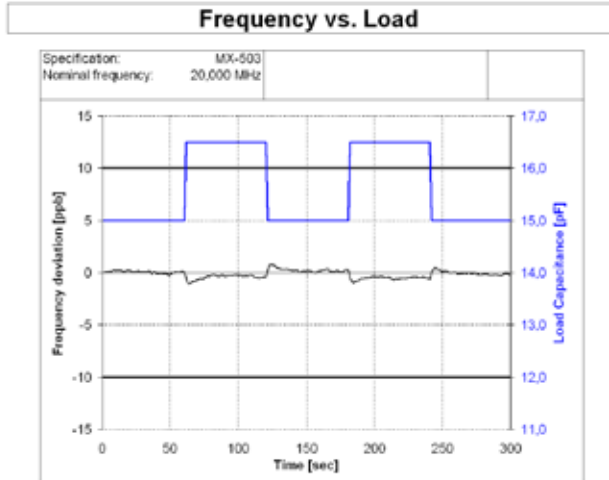

Aging

Aging: MX-503 @ 20MHz

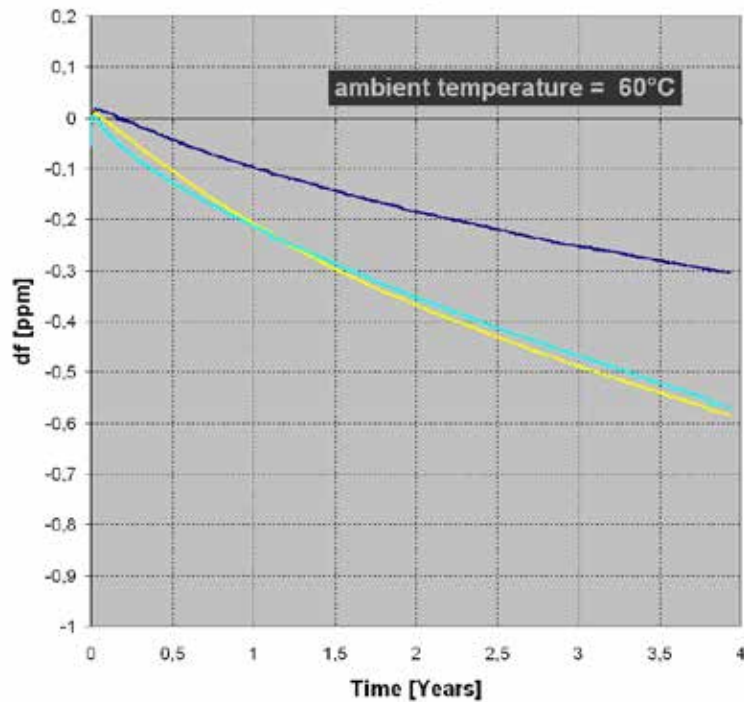

Recommended Reflow Profile


TP: max 250°C (@ solder joint, customer board level)

T_p: max: 10...30 sec


Additional Information:

This SMD oscillator has been designed for pick and place reflow soldering

SMD oscillators must be on the top side of the PCB during the reflow process.

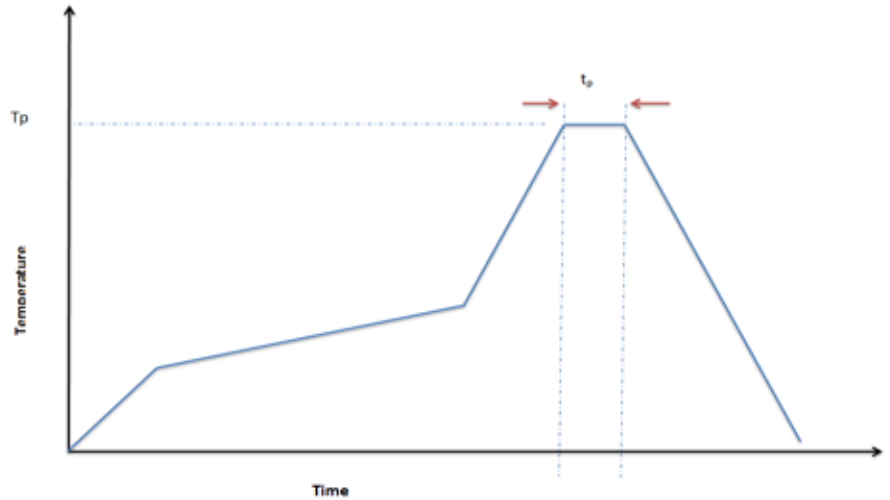

Standard Shipping Method (MX-503)

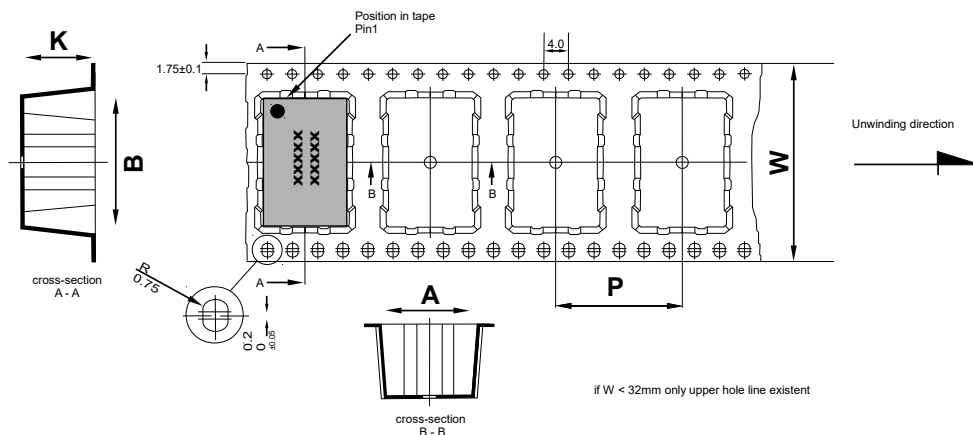


Dimension in mm:
 A, B and K are dependent upon component dimensions
 production tolerance complying DIN IEC 286-3

All dimensions in millimeters unless otherwise stated

Enclosure Type	Tape Width W (mm)	Quantity per meter	Quantity per reel	Dimension P
G287	24	83,3	750	16

Ordering Information^{1,3}

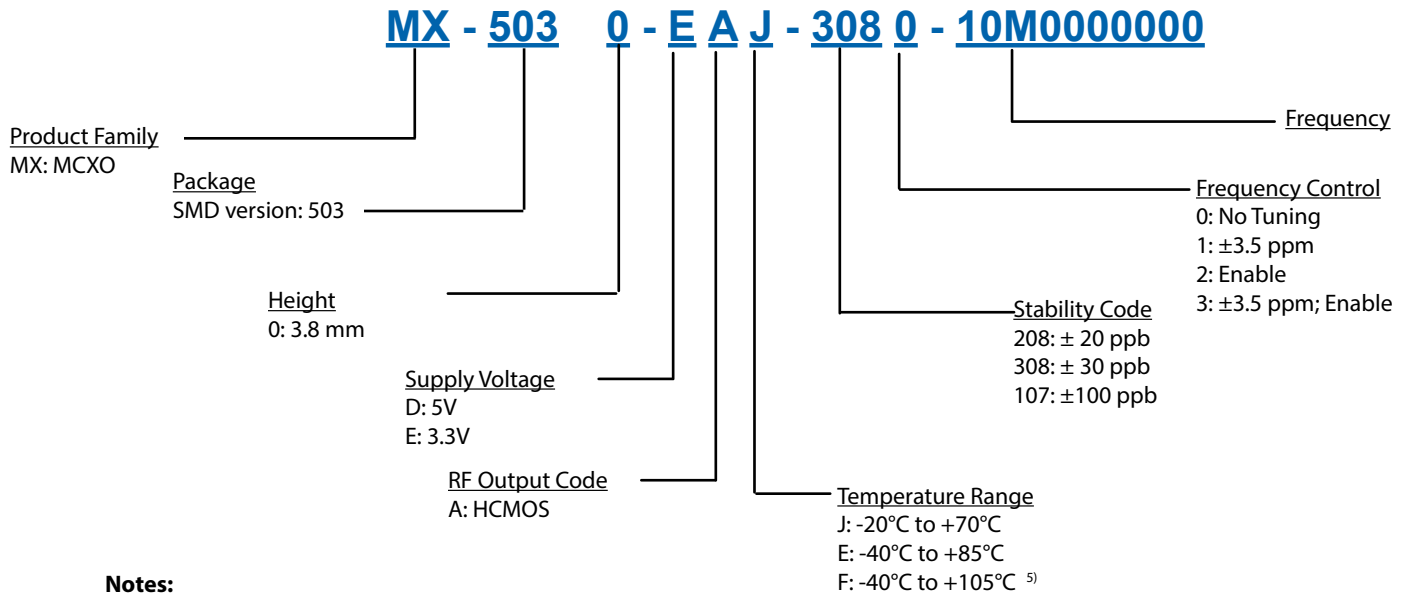

Notes:

1. Contact factory for other frequencies. Not all options and codes are available at all frequencies.
2. Unless otherwise stated conditions are valid at F=20MHz; V_s=3.3V; V_c=1.65; T=25°C; Output Signal=HCMOS; load=15pF
3. Contact factory for availability.
4. Phase noise degrades with increasing output frequency.
5. In preparation with stability code 107

Subject to technical modification.



Microsemi® Headquarters
One E. McGinnis, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4813
Outside the USA: +1 (949) 300-6100
Sales: +1 (949) 360-6130
Fax: +1 (949) 575-4998
email: sales.support@microsemi.com
www.microsemi.com

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (NASDAQ: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and rad-hardened analog, mixed-signal integrated circuits, FPGAs, SoCs and ASICs, power management products, timing and synchronization devices, and precision time solutions, serving the world's toughest markets, while providing advanced RF solutions, secure components, on-chip storage and communications solutions, security technologies and scalable, low-temperature products, Ethernet solutions, Power-over-Ethernet ICs and multiplexers, as well as custom design capabilities and services. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or service. The products and services and any other products sold by Microsemi have been subject to limited testing and should not be used in conditions with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not certified, and Buyer must conduct such testing and performance and other testing of its products, uses and inputs with its intended or any end-product. Buyer must not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the Buyer must accept such information in entirety with the Buyer. Microsemi does not grant, authorize or consent, in any way, any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to this document, as to its products and services, at any time without notice.

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.