



Description

The VS-504 dual frequency VCSO (Voltage Controlled Saw Oscillator) from Vectron is a high frequency, ultra low phase noise oscillator designed to support high speed data converters and 100G coherent optical receivers. The VS-504 provides 12fs rms jitter in the 12kHz to 20MHz integration bandwidth and is available from 1GHz to 2.5GHz. Two frequencies are switchable.

Features

- Frequency Range 0.6 to 3.0 GHz
- Dual Frequency
- Ultra low jitter performance
- Typical Jitter: 12fsec rms, 12kHz to 20MHz
- 3.3 supply voltage
- Output sinewave + balanced sinewave + LVPECL
- 9x14 mm SMD package
- See table on Page 5 for standard frequencies

Applications

- High Speed ADCs
- 100G / 200G / 400G Coherent Receivers
- Test & Measurement

Performance Specifications

Pulling Characteristics					
Parameter	Min	Typ	Max	Units	Notes
Absolute Pull Range (APR)	±20			ppm	Includes df vs: •Operating temperature range +10 .. 85°C •Aging 10 years •Supply Voltage Change 5% •Load change 10%
Tuning Slope	Positive				
Control Voltage Range	0	1.65	3.3	VDC	with $V_s = 3.3V$
Frequency control input impedance	10			kΩ	
Supply Voltage (V_s)					
Supply voltage	3.135	3.3	3.465	VDC	
Current consumption			95	mA	@ Sinewave / Balanced Sinewave
			100	mA	@ LVPECL

Performance Specifications (Continued)


RF Output					
Parameter	Min	Typ	Max	Units	Notes
Signal	Sinewave				
Load	45	50	55	Ω	
Output Power	7	8.5	12	dBm	
Signal	Balanced Sinewave				
Load	45	50	55	Ω	
Output Power	0	3	6	dBm	
Phase difference between output signal pairs			± 10	$^{\circ}$	
Signal	LVPECL				
Load	45	50	55	Ω	
Duty Cycle	45		55	%	
Subharmonics			-25	dBc	
Phase Noise: 100Hz offset		-70		dBc/Hz	@ 1.75GHz Balanced Sinewave
Phase Noise: 1kHz offset		-98		dBc/Hz	
Phase Noise: 10kHz offset		-122		dBc/Hz	
Phase Noise: 100kHz offset		-145		dBc/Hz	
Phase Noise: 1MHz offset		-159		dBc/Hz	
Phase Noise: 10MHz offset		-163		dBc/Hz	
Jitter: 12kHz to 20MHz offset		10		fs rms	
Phase Noise: 100Hz offset		-69		dBc/Hz	@ 1.98GHz Balanced Sinewave
Phase Noise: 1kHz offset		-97		dBc/Hz	
Phase Noise: 10kHz offset		-120		dBc/Hz	
Phase Noise: 100kHz offset		-142		dBc/Hz	
Phase Noise: 1MHz offset		-158		dBc/Hz	
Phase Noise 10MHz offset		-159		dBc/Hz	
Additional Parameters					
Weight	2.0g				
Processing and Packing	Handling and Processing Note				
Absolute Maximum Ratings					
Parameter	Min		Max	Units	Notes
Supply Voltage (V_s)			6.0	V	
Operable Temperature Range	-40		+85	$^{\circ}\text{C}$	
Storage Temperature Range	-40		+95	$^{\circ}\text{C}$	

Typical Performance

Phase Noise

VS-504 @ 1.75GHz Balanced Sinewave


Agilent E5052A Signal Source Analyzer

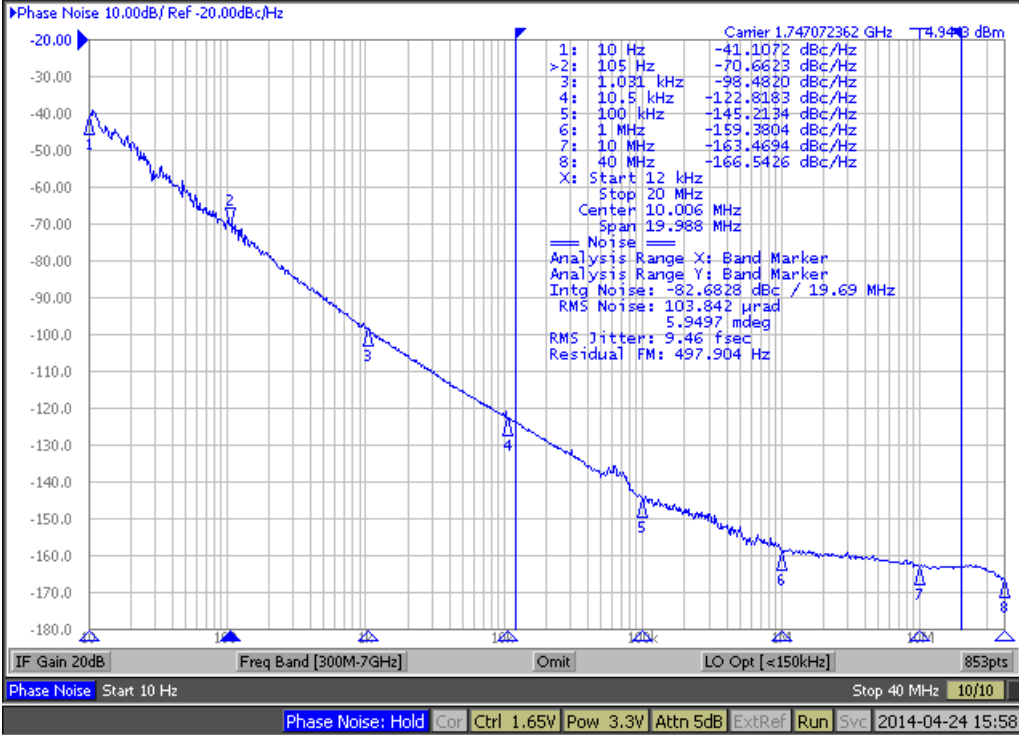

Phase Noise

VS-504 @ 1.98GHz Balanced Sinewave


Agilent E5052A Signal Source Analyzer

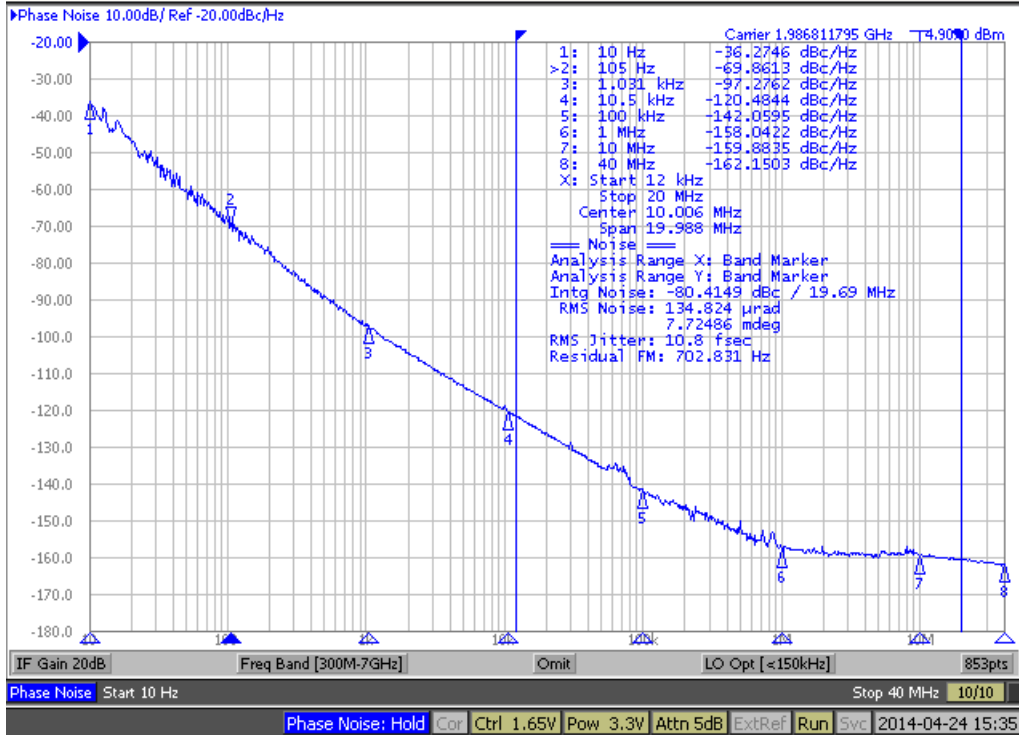

Outline Drawing / Enclosure

Package Codes		
Code	Height "H"	Pin Length "L"
G218K	4.8	NA

Dimensions in mm

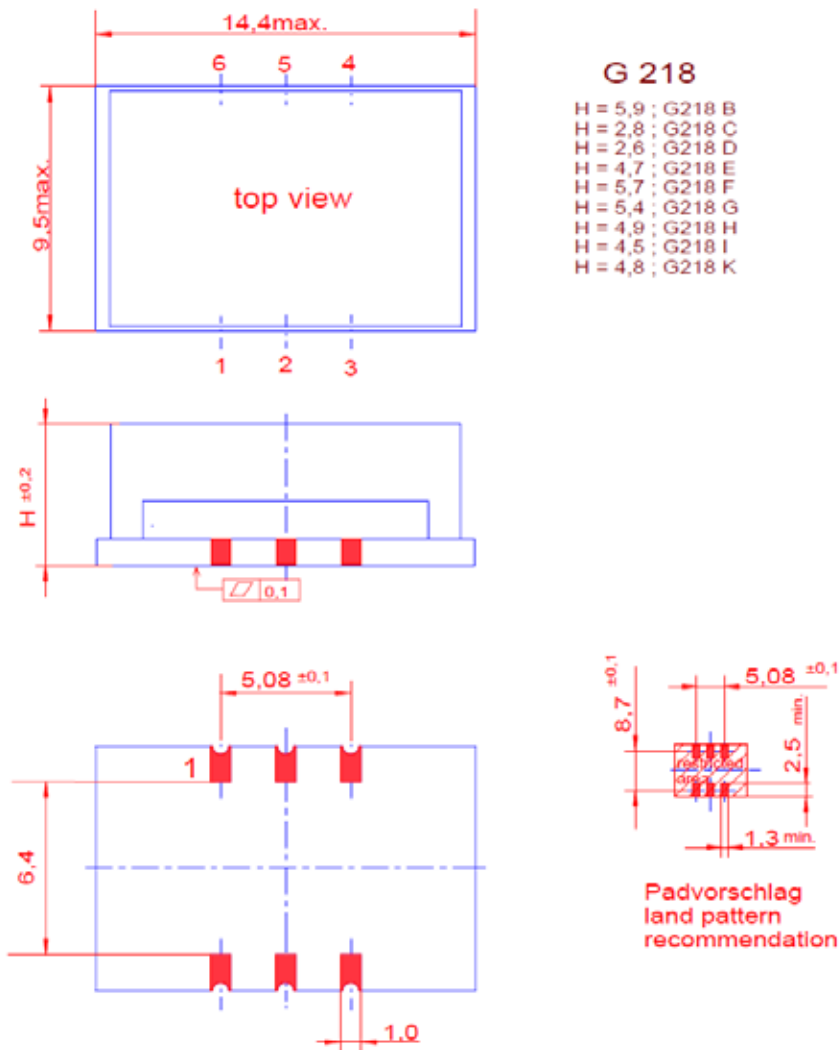


Pin Assignment (Sinewave)	
1	Control Voltage (V_C)
2	Frequency Select
3	GND
4	RF Out
5	GND
6	Supply Voltage Input (V_S)

Pin Assignment (Balanced Sinewave)	
1	Control Voltage (V_C)
2	Frequency Select
3	GND
4	RF Out
5	RF Out compl. (180° phase shifted)
6	Supply Voltage Input (V_S)

Marking
VS-504-xxxx
Frequency_1/Frequency_2
•AYYWW

Standard Shipping Method

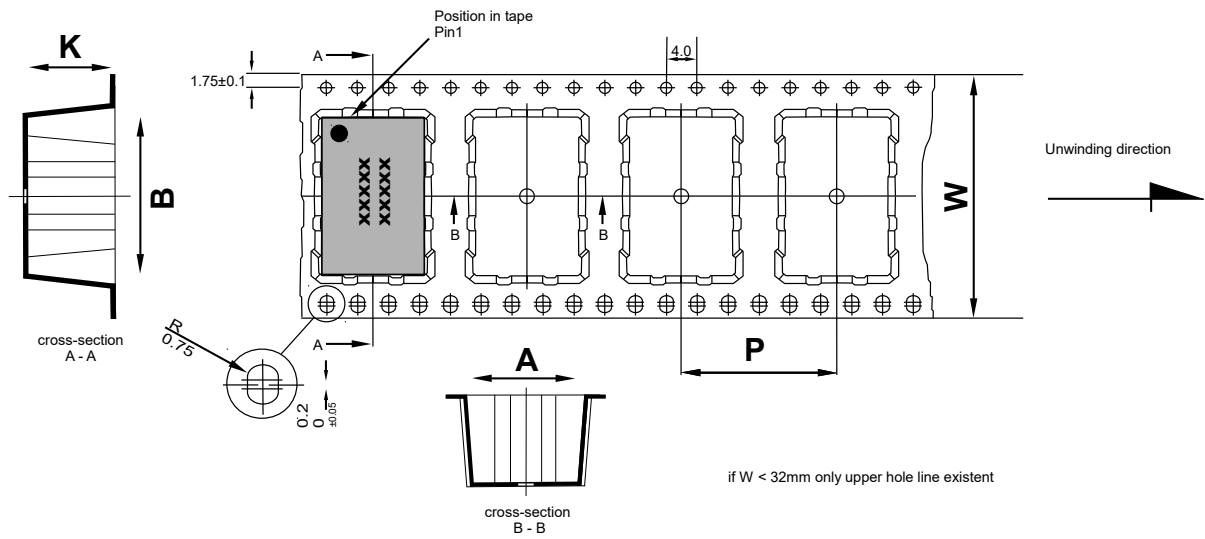

Dimension in mm:

A, B and K are dependent upon component dimensions
production tolerance complying DIN IEC 286-3

All dimensions in millimeters unless otherwise stated

Enclosure Type	Tape Width W (mm)	Quantity per meter	Quantity per reel	Dimension P
G218K	24		850	12

Recommended Reflow Profile


TP: max 250°C (@ solder joint, customer board level)

T_p: max: 10...30 sec

Additional Information:


This SMD oscillator has been designed for pick and place reflow soldering

SMD oscillators must be on the top side of the PCB during the reflow process.

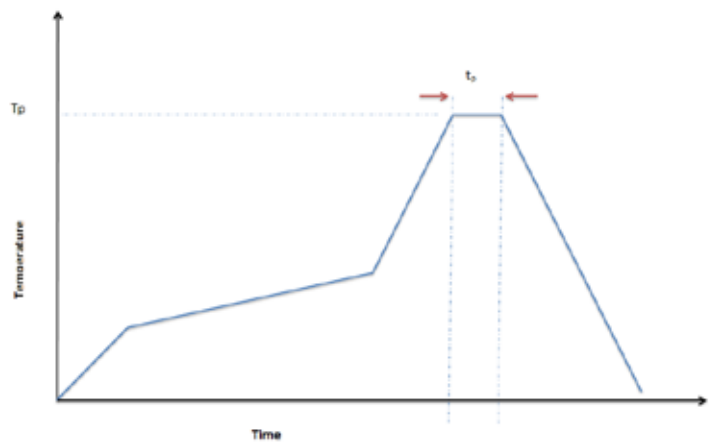

Ordering Information

VS - 504 0 - E E X - 205 X - 1747M030837 - 1986M819383

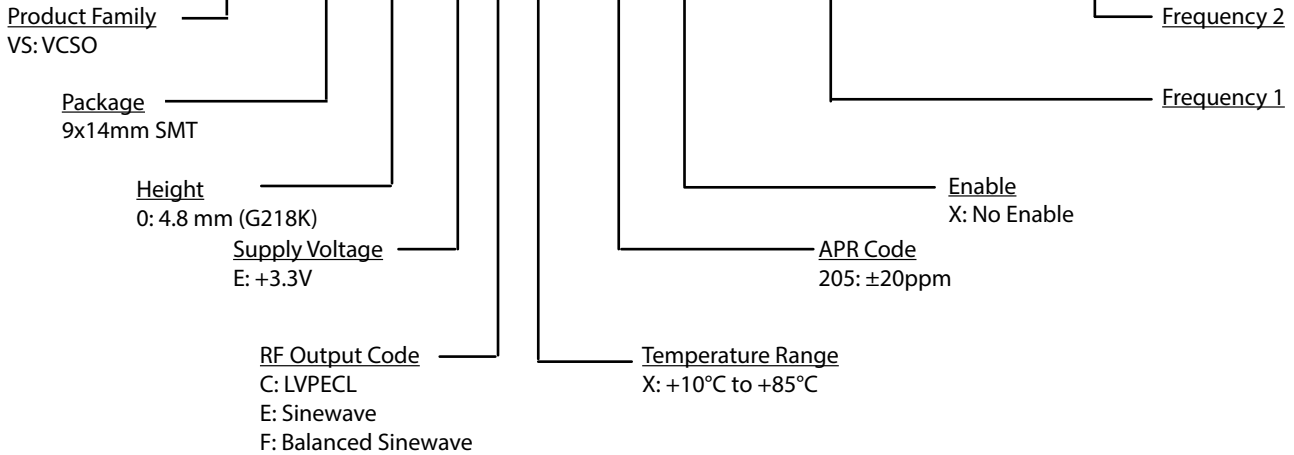

Standard Frequencies (MHz)						
632.8125	784.489605	832	867.1875	873.5154185	949.976022	980.604559
993.4096915	1000	1024.23965	1034.337568	1040	1067.686799	1200
1265.625	1280	1568.97921	1687.5	1701.32	1707.08	1734.375
1747.030837	1747.62305	1748.366885	1769.145	1875	1879.437686	1884.052863
1899.952044	1961.209118	1968.75	1986.819383	2000	2048.4793	2068.675135
2104.658326	2135.373597	2187.5	2400	2457.6	2560	2812.5
2949.12						

Other Frequencies Available Upon Request

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.



Microsemi Headquarters
 One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4111
 Outside the USA: +1 (949) 360-0100
 Telex: +1 (949) 360-0130
 Fax: +1 (949) 215-4999
 email: sales.usinfo@microsemi.com
 www.microsemi.com

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (hereinafter, "Microchip"), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and mission-critical embedded analog, mixed-signal, integrated circuits, FPGAs, SoCs, and ASICs, power management products, timing and synchronization devices, and precision time solutions, testing and analysis equipment for test, trace, processing devices, RF solutions, vision components, computer storage and communication solutions, security technologies and solutions and sensor products, Ethernet solutions, Power over Ethernet ICs and modules, as well as custom design capabilities and services. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or service. The products and services and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with critical systems or applications. Any performance specifications are believed to be correct but are not verified, and Buyer shall conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test or verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the buyer will acknowledge such information is solely with the Buyer. Microsemi does not grant, implicitly or otherwise, to any party any patent rights, licenses, or any other IP rights, without written request to such information based on anything disclosed by such information. Information disclosed in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document at its any products and services at any time without notice.

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.